


MITOS

Design: FEB Rienzi

Suspension lighting fixtures with tilting laminated optic

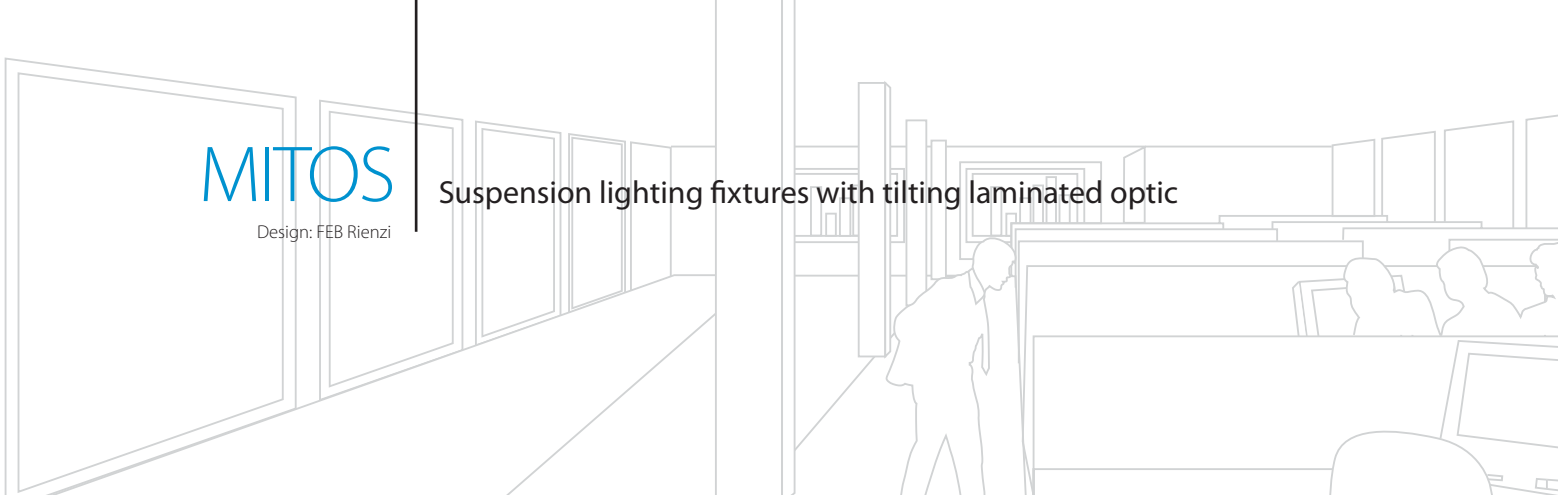

Single lamp lighting fixture (T5 OID CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optic, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 474512863000 | 1x28W | 1221x124x102 | 248,20 |
| 474513563000 | 1x35W | 1521x124x102 | 276,40 |
| 474515463000 | 1x54W | 1221x124x102 | 248,50 |
| 474518063000 | 1x80W | 1521x124x102 | 280,60 |



Colour embossed grey

Single lamp lighting fixture (T5 OID CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, simple suspension system and electrified suspension with transparent wire 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|--------------|---------------|
| 474612863000 | 1x28W | 1197x124x102 | 248,50 |
| 474613563000 | 1x35W | 1497x124x102 | 277,30 |
| 474615463000 | 1x54W | 1197x124x102 | 248,80 |
| 474618063000 | 1x80W | 1497x124x102 | 281,50 |



Colour embossed grey

Single lamp lighting fixture (T5 OID CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 474712863000 | 1x28W | 1197x124x102 | 240,90 |
| 474713563000 | 1x35W | 1497x124x102 | 269,60 |
| 474715463000 | 1x54W | 1197x124x102 | 241,20 |
| 474718063000 | 1x80W | 1497x124x102 | 273,80 |



Colour embossed grey

Ceiling lighting fixtures with tilting laminated optic

Single lamp lighting fixture (T5 OID CEL) single ceiling-mounting.

The fixtures are supplied with end heads, laminated optic, two fixtures for mounting to ceiling and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 474812863000 | 1x28W | 1221x124x102 | 222,60 |
| 474813563000 | 1x35W | 1521x124x102 | 250,80 |
| 474815463000 | 1x54W | 1221x124x102 | 222,90 |
| 474818063000 | 1x80W | 1521x124x102 | 255,00 |



Colour
embossed grey

Single lamp lighting fixture (T5 OID CEL) in-line ceiling-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and two fixtures for mounting to ceiling, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|--------------|---------------|
| 474912863000 | 1x28W | 1197x124x102 | 220,10 |
| 474913563000 | 1x35W | 1497x124x102 | 248,80 |
| 474915463000 | 1x54W | 1197x124x102 | 220,40 |
| 474918063000 | 1x80W | 1497x124x102 | 253,00 |



Colour
embossed grey

Single lamp lighting fixture (T5 OID CEL) in-line ceiling-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and two fixtures for mounting to ceiling, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 475012863000 | 1x28W | 1197x124x102 | 218,90 |
| 475013563000 | 1x35W | 1497x124x102 | 247,60 |
| 475015463000 | 1x54W | 1197x124x102 | 219,20 |
| 475018063000 | 1x80W | 1497x124x102 | 251,80 |




Colour
embossed grey

MITOS

Design: FEB Rienzi

Wall lighting fixtures with tilting laminated optic

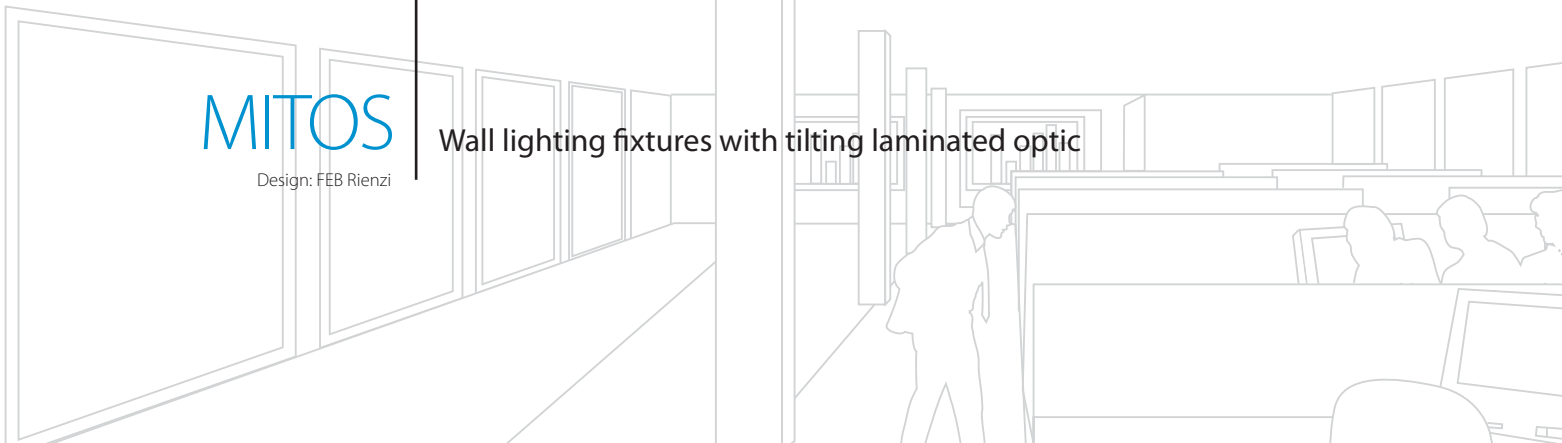

Single lamp lighting fixture (T5 OID CEL) single wall-mounting.

The fixtures are supplied with end heads, laminated optic, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 475112163000 | 1x21W | 921x124x102 | 213,30 |
| 475112863000 | 1x28W | 1221x124x102 | 253,00 |
| 475113563000 | 1x35W | 1521x124x102 | 281,20 |
| 475113963000 | 1x39W | 921x124x102 | 213,60 |
| 475115463000 | 1x54W | 1221x124x102 | 253,30 |
| 475118063000 | 1x80W | 1521x124x102 | 285,40 |



Colour embossed grey

Single lamp lighting fixture (T5 OID CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|--------------|---------------|
| 475212863000 | 1x28W | 1197x124x102 | 250,50 |
| 475213563000 | 1x35W | 1497x124x102 | 279,20 |
| 475215463000 | 1x54W | 1197x124x102 | 250,80 |
| 475218063000 | 1x80W | 1497x124x102 | 283,40 |



Colour embossed grey

Single lamp lighting fixture (T5 OID CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 475312863000 | 1x28W | 1197x124x102 | 249,30 |
| 475313563000 | 1x35W | 1497x124x102 | 278,00 |
| 475315463000 | 1x54W | 1197x124x102 | 249,60 |
| 475318063000 | 1x80W | 1497x124x102 | 282,20 |



Colour embossed grey

Suspension lighting fixtures with tilting laminated optic

Single lamp lighting fixture (T5 OIB CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optic, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wire 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 475412863000 | 1x28W | 1221x124x102 | 263,50 |
| 475413563000 | 1x35W | 1521x124x102 | 295,20 |
| 475415463000 | 1x54W | 1221x124x102 | 263,80 |
| 475418063000 | 1x80W | 1521x124x102 | 299,40 |



Colour
embossed grey

Single lamp lighting fixture (T5 OIB CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm² without end heads.



| | | | |
|--------------|-------|--------------|---------------|
| 475512863000 | 1x28W | 1197x124x102 | 263,80 |
| 475513563000 | 1x35W | 1497x124x102 | 296,10 |
| 475515463000 | 1x54W | 1197x124x102 | 264,10 |
| 475518063000 | 1x80W | 1497x124x102 | 300,30 |



Colour
embossed grey

Single lamp lighting fixture (T5 OIB CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, top clear polycarbonate diffuser and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 475612863000 | 1x28W | 1197x124x102 | 256,20 |
| 475613563000 | 1x35W | 1497x124x102 | 288,40 |
| 475615463000 | 1x54W | 1197x124x102 | 256,50 |
| 475618063000 | 1x80W | 1497x124x102 | 292,60 |




Colour
embossed grey

MITOS

Design: FEB Rienzi

Wall lighting fixtures with tilting laminated optic

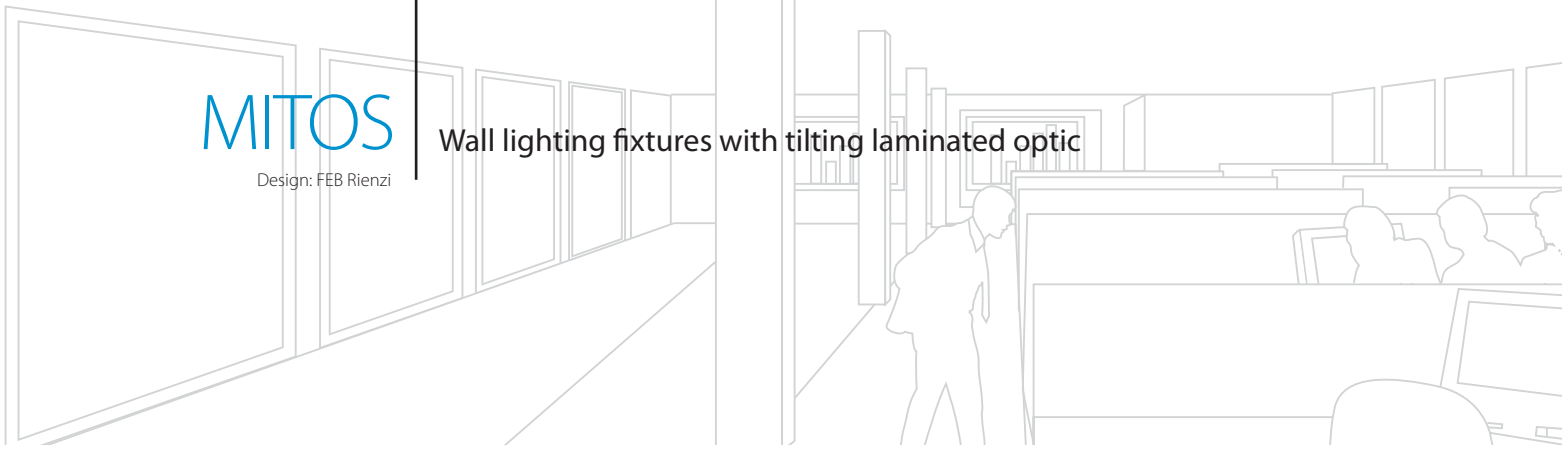

Single lamp lighting fixture (T5 OIB CEL) single wall-mounting.

The fixtures are supplied with end heads, laminated optic, top clear polycarbonate diffuser, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 475712163000 | 1x21W | 921x124x102 | 225,10 |
| 475712863000 | 1x28W | 1221x124x102 | 268,30 |
| 475713563000 | 1x35W | 1521x124x102 | 300,00 |
| 475713963000 | 1x39W | 921x124x102 | 225,40 |
| 475715463000 | 1x54W | 1221x124x102 | 268,60 |
| 475718063000 | 1x80W | 1521x124x102 | 304,20 |



Colour
embossed grey

Single lamp lighting fixture (T5 OIB CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, top clear polycarbonate diffuser and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|--------------|---------------|
| 475812863000 | 1x28W | 1197x124x102 | 265,80 |
| 475813563000 | 1x35W | 1497x124x102 | 298,00 |
| 475815463000 | 1x54W | 1197x124x102 | 266,10 |
| 475818063000 | 1x80W | 1497x124x102 | 302,20 |



Colour
embossed grey

Single lamp lighting fixture (T5 OIB CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, top clear polycarbonate diffuser and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 475912863000 | 1x28W | 1197x124x102 | 264,60 |
| 475913563000 | 1x35W | 1497x124x102 | 296,80 |
| 475915463000 | 1x54W | 1197x124x102 | 264,90 |
| 475918063000 | 1x80W | 1497x124x102 | 301,00 |



Colour
embossed grey

End head single lamp.

Die-cast aluminium, screws fixing.
To be mounted to the end lighting fixtures of the line.



Code

479912163000



Size mm

12x124x54

Euro

7,00

Colour
embossed grey



Linear joint single lamp.

Die-cast aluminium, screws fixing.
This feature creates a linear joint between two lighting fixtures.



479992163000



12x124x54



6,50

Colour
embossed grey





Lighting fixtures for interiors.
The MITOS line of lighting fixtures includes a selection of models suspension, ceiling and wall mount, all are supplied with lamps type OSRAM T5 (Ø 16) colour code 840 and are ready for installation without having to disassemble and then reassemble for mounting.

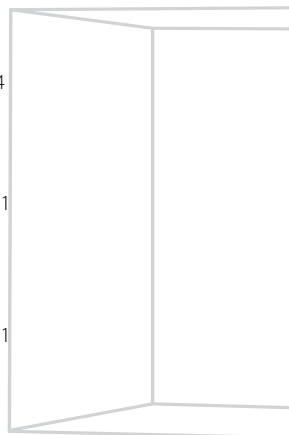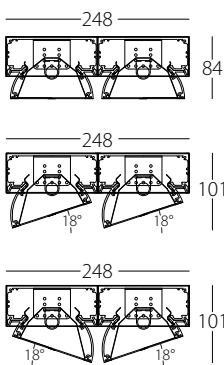

BODY

High-thickness aluminium profile die-cast aluminium end heads and joints.

DIFFUSER

Self-extinguishing two-component polycarbonate, satin finish, opaline coloured.

OPTIC

Laminated specular aluminium 99.9 plated, anti-glare with low iridescence, low luminance and high efficiency.

COATING

Baked with epoxy powder paint, resistant to damp and UV ray stabilised.

MOUNTING

Suspension, ceiling or wall both in single and continuous wiring.

REGULATIONS

The product conforms to the governing standards EN 60598 concerning electrical safety and standards EN 55015 and EN 61000 concerning electromagnetic compatibility, grade of insulation protection IP40 for models with diffuser and IP20 for models with optic and which can be installed on inflammable surfaces.

WIRING

Power supply with electronic ballast TRIDONIC 230V 50/60Hz (alternative Osram and Helvar). Wire with a cross section 0,5 mm² insulated with PVC heat resistant up to 90°C conforming to standard CEI20-20/1 (HD21.1 S3) Polycarbonate lamp holders with phosphorus bronze contacts. Terminal block 2P+T manufactured in polycarbonate. 2.5A fuse. For the models to be installed in a continuous line snap-fit connectors are provided with wiring 3x1,5 mm² insulated with PVC-HT heat resistance up to 90° conforming to standard CEI-20/20/1 (HD 21.1 s3).

POWER SUPPLY

SINGLE MOUNTING
 PVC 3x0,75 mm² round transparent wire, internal cables heat resistant up to 90°C, protective covering heat resistant up to 105°C

IN-LINE MOUNTING

PVC 3x1,5 mm² round transparent wire, internal cables heat resistant up to 90°C, protective covering heat resistant up to 105°C.

MODEL UPON REQUEST

Wiring with digital dimmer electronic ballast, wiring with DALI dimmer electronic ballast, wiring to an emergency unit for continuous lighting up to 3 hours, special colour, specific lengths.

MITOS

Twin lamp

Design: FEB Rienzi



Suspension lighting fixtures with diffusers

Twin lamp lighting fixture (T5 SDD CEL) single suspension-mounting.

The fixtures are supplied with end heads, diffusers, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 470022863000 | 2x28W | 1221x248x84 | 364,70 |
| 470023563000 | 2x35W | 1521x248x84 | 410,20 |
| 470025463000 | 2x54W | 1221x248x84 | 365,30 |
| 470028063000 | 2x80W | 1521x248x84 | 434,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 470122863000 | 2x28W | 1197x248x84 | 362,00 |
| 470123563000 | 2x35W | 1497x248x84 | 408,00 |
| 470125463000 | 2x54W | 1197x248x84 | 362,60 |
| 470128063000 | 2x80W | 1497x248x84 | 432,30 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 470222863000 | 2x28W | 1197x248x84 | 354,50 |
| 470223563000 | 2x35W | 1497x248x84 | 400,50 |
| 470225463000 | 2x54W | 1197x248x84 | 355,10 |
| 470228063000 | 2x80W | 1497x248x84 | 424,80 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Ceiling lighting fixtures with diffusers

Twin lamp lighting fixture (T5 SDD CEL) single ceiling-mounting.

The fixtures are supplied with end heads, diffusers, two fixtures for mounting to ceiling and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 470322863000 | 2x28W | 1221x248x84 | 340,60 |
| 470323563000 | 2x35W | 1521x248x84 | 386,10 |
| 470325463000 | 2x54W | 1221x248x84 | 341,20 |
| 470328063000 | 2x80W | 1521x248x84 | 410,40 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line ceiling-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and two fixtures for mounting to ceiling, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 470422863000 | 2x28W | 1197x248x84 | 335,20 |
| 470423563000 | 2x35W | 1497x248x84 | 381,20 |
| 470425463000 | 2x54W | 1197x248x84 | 335,80 |
| 470428063000 | 2x80W | 1497x248x84 | 405,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line ceiling-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and two fixtures for mounting to ceiling, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 470522863000 | 2x28W | 1197x248x84 | 334,00 |
| 470523563000 | 2x35W | 1497x248x84 | 380,00 |
| 470525463000 | 2x54W | 1197x248x84 | 334,60 |
| 470528063000 | 2x80W | 1497x248x84 | 404,30 |



Colour
embossed grey

Wall lighting fixtures with diffusers

Twin lamp lighting fixture (T5 SDD CEL) single wall-mounting.

The fixtures are supplied with end heads, diffusers, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 470622863000 | 2x28W | 1221x248x84 | 367,70 |
| 470623563000 | 2x35W | 1521x248x84 | 413,20 |
| 470625463000 | 2x54W | 1221x248x84 | 368,30 |
| 470628063000 | 2x80W | 1521x248x84 | 437,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 470722863000 | 2x28W | 1197x248x84 | 362,30 |
| 470723563000 | 2x35W | 1497x248x84 | 408,30 |
| 470725463000 | 2x54W | 1197x248x84 | 362,90 |
| 470728063000 | 2x80W | 1497x248x84 | 432,60 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 470822863000 | 2x28W | 1197x248x84 | 361,10 |
| 470823563000 | 2x35W | 1497x248x84 | 407,10 |
| 470825463000 | 2x54W | 1197x248x84 | 361,70 |
| 470828063000 | 2x80W | 1497x248x84 | 431,40 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Suspension lighting fixtures with diffusers

Twin lamp lighting fixture (T5 SDB CEL) single suspension-mounting.

The fixtures are supplied with end heads, diffusers, top clear polycarbonate diffusers, simple suspension system and electrified suspension with transparent wire 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 470922863000 | 2x28W | 1221x248x84 | 395,30 |
| 470923563000 | 2x35W | 1521x248x84 | 447,80 |
| 470925463000 | 2x54W | 1221x248x84 | 395,90 |
| 470928063000 | 2x80W | 1521x248x84 | 472,10 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDB CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffusers, simple suspension system and electrified suspension 3x1,5 mm² without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 471022863000 | 2x28W | 1197x248x84 | 392,60 |
| 471023563000 | 2x35W | 1497x248x84 | 445,60 |
| 471025463000 | 2x54W | 1197x248x84 | 393,20 |
| 471028063000 | 2x80W | 1497x248x84 | 469,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDB CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffusers, two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 471122863000 | 2x28W | 1197x248x84 | 385,10 |
| 471123563000 | 2x35W | 1497x248x84 | 438,10 |
| 471125463000 | 2x54W | 1197x248x84 | 385,70 |
| 471128063000 | 2x80W | 1497x248x84 | 462,40 |



Colour
embossed grey

Wall lighting fixtures with diffusers

Twin lamp lighting fixture (T5 SDB CEL) single wall-mounting.

The fixtures are supplied with end heads, diffusers, top clear polycarbonate diffusers, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 471222863000 | 2x28W | 1221x248x84 | 398,30 |
| 471223563000 | 2x35W | 1521x248x84 | 450,80 |
| 471225463000 | 2x54W | 1221x248x84 | 398,90 |
| 471228063000 | 2x80W | 1521x248x84 | 475,10 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDB CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffusers, fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 471322863000 | 2x28W | 1197x248x84 | 392,90 |
| 471323563000 | 2x35W | 1497x248x84 | 445,90 |
| 471325463000 | 2x54W | 1197x248x84 | 393,50 |
| 471328063000 | 2x80W | 1497x248x84 | 470,20 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDB CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffusers, fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 471422863000 | 2x28W | 1197x248x84 | 391,70 |
| 471423563000 | 2x35W | 1497x248x84 | 444,70 |
| 471425463000 | 2x54W | 1197x248x84 | 392,30 |
| 471428063000 | 2x80W | 1497x248x84 | 469,00 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Suspension lighting fixtures with laminated optics

Twin lamp lighting fixture (T5 ODD CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optics, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 471522863000 | 2x28W | 1221x248x84 | 434,30 |
| 471523563000 | 2x35W | 1521x248x84 | 490,60 |
| 471525463000 | 2x54W | 1221x248x84 | 434,90 |
| 471528063000 | 2x80W | 1521x248x84 | 514,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, simple suspension system and electrified suspension with transparent wire 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 471622863000 | 2x28W | 1197x248x84 | 431,60 |
| 471623563000 | 2x35W | 1497x248x84 | 488,40 |
| 471625463000 | 2x54W | 1197x248x84 | 432,20 |
| 471628063000 | 2x80W | 1497x248x84 | 512,70 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 471722863000 | 2x28W | 1197x248x84 | 424,10 |
| 471723563000 | 2x35W | 1497x248x84 | 480,90 |
| 471725463000 | 2x54W | 1197x248x84 | 424,70 |
| 471728063000 | 2x80W | 1497x248x84 | 505,20 |



Colour
embossed grey

Ceiling lighting fixtures with laminated optics

Twin lamp lighting fixture (T5 ODD CEL) single ceiling-mounting.

The fixtures are supplied with end heads, laminated optics, two fixtures for mounting to ceiling and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 471822863000 | 2x28W | 1221x248x84 | 410,20 |
| 471823563000 | 2x35W | 1521x248x84 | 466,50 |
| 471825463000 | 2x54W | 1221x248x84 | 410,80 |
| 471828063000 | 2x80W | 1521x248x84 | 490,80 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line ceiling-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and two fixtures for ceiling mounting, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 471922863000 | 2x28W | 1197x248x84 | 404,80 |
| 471923563000 | 2x35W | 1497x248x84 | 461,60 |
| 471925463000 | 2x54W | 1197x248x84 | 405,40 |
| 471928063000 | 2x80W | 1497x248x84 | 485,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line ceiling-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and two fixtures for ceiling mounting, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 472022863000 | 2x28W | 1197x248x84 | 403,60 |
| 472023563000 | 2x35W | 1497x248x84 | 460,40 |
| 472025463000 | 2x54W | 1197x248x84 | 404,20 |
| 472028063000 | 2x80W | 1497x248x84 | 484,70 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Wall lighting fixtures with laminated optics

Twin lamp lighting fixture (T5 ODD CEL) single wall-mounting.

The fixtures are supplied with end heads, laminated optics, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 472122863000 | 2x28W | 1221x248x84 | 437,30 |
| 472123563000 | 2x35W | 1521x248x84 | 493,60 |
| 472125463000 | 2x54W | 1221x248x84 | 437,90 |
| 472128063000 | 2x80W | 1521x248x84 | 517,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and fixture for wall mounting, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 472222863000 | 2x28W | 1197x248x84 | 431,90 |
| 472223563000 | 2x35W | 1497x248x84 | 488,70 |
| 472225463000 | 2x54W | 1197x248x84 | 432,50 |
| 472228063000 | 2x80W | 1497x248x84 | 513,00 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and fixture for wall mounting, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 472322863000 | 2x28W | 1197x248x84 | 430,70 |
| 472323563000 | 2x35W | 1497x248x84 | 487,50 |
| 472325463000 | 2x54W | 1197x248x84 | 431,30 |
| 472328063000 | 2x80W | 1497x248x84 | 511,80 |



Colour
embossed grey

Suspension lighting fixtures with laminated optics

Twin lamp lighting fixture (T5 ODB CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optics, top clear polycarbonate diffusers, simple suspension system and electrified suspension with transparent wire 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 472422863000 | 2x28W | 1221x248x84 | 464,90 |
| 472423563000 | 2x35W | 1521x248x84 | 528,20 |
| 472425463000 | 2x54W | 1221x248x84 | 465,50 |
| 472428063000 | 2x80W | 1521x248x84 | 552,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODB CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffusers, simple suspension system and electrified suspension with transparent wiring 3x1,5mm² without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 472522863000 | 2x28W | 1197x248x84 | 462,20 |
| 472523563000 | 2x35W | 1497x248x84 | 526,00 |
| 472525463000 | 2x54W | 1197x248x84 | 462,80 |
| 472528063000 | 2x80W | 1497x248x84 | 550,30 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODB CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffusers, two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 472622863000 | 2x28W | 1197x248x84 | 454,70 |
| 472623563000 | 2x35W | 1497x248x84 | 518,50 |
| 472625463000 | 2x54W | 1197x248x84 | 455,30 |
| 472628063000 | 2x80W | 1497x248x84 | 542,80 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Wall lighting fixtures with laminated optics

Twin lamp lighting fixture (T5 ODB CEL) single wall-mounting.

The fixtures are supplied with end heads, laminated optics, top clear polycarbonate diffusers, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 472722863000 | 2x28W | 1221x248x84 | 467,90 |
| 472723563000 | 2x35W | 1521x248x84 | 531,20 |
| 472725463000 | 2x54W | 1221x248x84 | 468,50 |
| 472728063000 | 2x80W | 1521x248x84 | 555,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODB CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffusers, fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 472822863000 | 2x28W | 1197x248x84 | 462,50 |
| 472823563000 | 2x35W | 1497x248x84 | 526,30 |
| 472825463000 | 2x54W | 1197x248x84 | 463,10 |
| 472828063000 | 2x80W | 1497x248x84 | 550,60 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODB CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffusers, fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 472922863000 | 2x28W | 1197x248x84 | 461,30 |
| 472923563000 | 2x35W | 1497x248x84 | 525,10 |
| 472925463000 | 2x54W | 1197x248x84 | 461,90 |
| 472928063000 | 2x80W | 1497x248x84 | 549,40 |



Colour
embossed grey

Suspension lighting fixtures with tilting diffusers

Twin lamp lighting fixture (T5 SID CEL) single suspension-mounting.

The fixtures are supplied with end heads, diffusers, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 473022863000 | 2x28W | 1221x248x102 | 364,70 |
| 473023563000 | 2x35W | 1521x248x102 | 410,20 |
| 473025463000 | 2x54W | 1221x248x102 | 365,30 |
| 473028063000 | 2x80W | 1521x248x102 | 434,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SID CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm² without end heads.



| | | | |
|--------------|-------|--------------|---------------|
| 473122863000 | 2x28W | 1197x248x102 | 362,00 |
| 473123563000 | 2x35W | 1497x248x102 | 408,00 |
| 473125463000 | 2x54W | 1197x248x102 | 362,60 |
| 473128063000 | 2x80W | 1497x248x102 | 432,30 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SID CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 473222863000 | 2x28W | 1197x248x102 | 354,50 |
| 473223563000 | 2x35W | 1497x248x102 | 400,50 |
| 473225463000 | 2x54W | 1197x248x102 | 355,10 |
| 473228063000 | 2x80W | 1497x248x102 | 424,80 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Ceiling lighting fixtures with tilting diffusers

Twin lamp lighting fixture (T5 SID CEL) single ceiling-mounting.

The fixtures are supplied with end heads, diffusers, two fixtures for mounting to ceiling and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 473322863000 | 2x28W | 1221x248x102 | 340,60 |
| 473323563000 | 2x35W | 1521x248x102 | 386,10 |
| 473325463000 | 2x54W | 1221x248x102 | 341,20 |
| 473328063000 | 2x80W | 1521x248x102 | 410,40 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SID CEL) in-line ceiling-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and two fixtures for mounting to ceiling, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|--------------|---------------|
| 473422863000 | 2x28W | 1197x248x102 | 335,20 |
| 473423563000 | 2x35W | 1497x248x102 | 381,20 |
| 473425463000 | 2x54W | 1197x248x102 | 335,80 |
| 473428063000 | 2x80W | 1497x248x102 | 405,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SID CEL) in-line ceiling-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and two fixtures for mounting to ceiling, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 473522863000 | 2x28W | 1197x248x102 | 334,00 |
| 473523563000 | 2x35W | 1497x248x102 | 380,00 |
| 473525463000 | 2x54W | 1197x248x102 | 334,60 |
| 473528063000 | 2x80W | 1497x248x102 | 404,30 |



Colour
embossed grey

Wall lighting fixtures with tilting diffusers

Twin lamp lighting fixture (T5 SID CEL) single wall-mounting.

The fixtures are supplied with end heads, diffusers, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 473622863000 | 2x28W | 1221x248x102 | 367,70 |
| 473623563000 | 2x35W | 1521x248x102 | 413,20 |
| 473625463000 | 2x54W | 1221x248x102 | 368,30 |
| 473628063000 | 2x80W | 1521x248x102 | 437,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SID CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|--------------|---------------|
| 473722863000 | 2x28W | 1197x248x102 | 362,30 |
| 473723563000 | 2x35W | 1497x248x102 | 408,30 |
| 473725463000 | 2x54W | 1197x248x102 | 362,90 |
| 473728063000 | 2x80W | 1497x248x102 | 432,60 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SID CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 473822863000 | 2x28W | 1197x248x102 | 361,10 |
| 473823563000 | 2x35W | 1497x248x102 | 407,10 |
| 473825463000 | 2x54W | 1197x248x102 | 361,70 |
| 473828063000 | 2x80W | 1497x248x102 | 431,40 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Suspension lighting fixtures with tilting diffusers

Twin lamp lighting fixture (T5 SIB CEL) single suspension-mounting.

The fixtures are supplied with end heads, diffusers, top clear polycarbonate diffusers, simple suspension system and electrified suspension with transparent wire 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 473922863000 | 2x28W | 1221x248x102 | 395,30 |
| 473923563000 | 2x35W | 1521x248x102 | 447,80 |
| 473925463000 | 2x54W | 1221x248x102 | 395,90 |
| 473928063000 | 2x80W | 1521x248x102 | 472,10 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SIB CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffusers, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm² without end heads.



| | | | |
|--------------|-------|--------------|---------------|
| 474022863000 | 2x28W | 1197x248x102 | 392,60 |
| 474023563000 | 2x35W | 1497x248x102 | 445,60 |
| 474025463000 | 2x54W | 1197x248x102 | 393,20 |
| 474028063000 | 2x80W | 1497x248x102 | 469,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SIB CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffusers, two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 474122863000 | 2x28W | 1197x248x102 | 385,10 |
| 474123563000 | 2x35W | 1497x248x102 | 438,10 |
| 474125463000 | 2x54W | 1197x248x102 | 385,70 |
| 474128063000 | 2x80W | 1497x248x102 | 462,40 |



Colour
embossed grey

Wall lighting fixtures with tilting diffusers

Twin lamp lighting fixture (T5 SIB CEL) single wall-mounting.

The fixtures are supplied with end heads, diffusers, top clear polycarbonate diffusers, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 474222863000 | 2x28W | 1221x248x102 | 398,30 |
| 474223563000 | 2x35W | 1521x248x102 | 450,80 |
| 474225463000 | 2x54W | 1221x248x102 | 398,90 |
| 474228063000 | 2x80W | 1521x248x102 | 475,10 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SIB CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffusers, fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|--------------|---------------|
| 474322863000 | 2x28W | 1197x248x102 | 392,90 |
| 474323563000 | 2x35W | 1497x248x102 | 445,90 |
| 474325463000 | 2x54W | 1197x248x102 | 393,50 |
| 474328063000 | 2x80W | 1497x248x102 | 470,20 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SIB CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffusers, fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 474422863000 | 2x28W | 1197x248x102 | 391,70 |
| 474423563000 | 2x35W | 1497x248x102 | 444,70 |
| 474425463000 | 2x54W | 1197x248x102 | 392,30 |
| 474428063000 | 2x80W | 1497x248x102 | 469,00 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Suspension lighting fixtures with tilting laminated optics

Twin lamp lighting fixture (T5 OID CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optics, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 474522863000 | 2x28W | 1221x248x102 | 434,30 |
| 474523563000 | 2x35W | 1521x248x102 | 490,60 |
| 474525463000 | 2x54W | 1221x248x102 | 434,90 |
| 474528063000 | 2x80W | 1521x248x102 | 514,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OID CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, simple suspension system and electrified suspension with transparent wire 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|--------------|---------------|
| 474622863000 | 2x28W | 1197x248x102 | 431,60 |
| 474623563000 | 2x35W | 1497x248x102 | 488,40 |
| 474625463000 | 2x54W | 1197x248x102 | 432,20 |
| 474628063000 | 2x80W | 1497x248x102 | 512,70 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OID CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 474722863000 | 2x28W | 1197x248x102 | 424,10 |
| 474723563000 | 2x35W | 1497x248x102 | 480,90 |
| 474725463000 | 2x54W | 1197x248x102 | 424,70 |
| 474728063000 | 2x80W | 1497x248x102 | 505,20 |



Colour
embossed grey

Ceiling lighting fixtures with tilting laminated optics

Twin lamp lighting fixture (T5 OID CEL) single ceiling-mounting.

The fixtures are supplied with end heads, laminated optics, two fixtures for mounting to ceiling and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 474822863000 | 2x28W | 1221x248x102 | 410,20 |
| 474823563000 | 2x35W | 1521x248x102 | 466,50 |
| 474825463000 | 2x54W | 1221x248x102 | 410,80 |
| 474828063000 | 2x80W | 1521x248x102 | 490,80 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OID CEL) in-line ceiling-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and two fixtures for ceiling mounting, ceiling, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|--------------|---------------|
| 474922863000 | 2x28W | 1197x248x102 | 404,80 |
| 474923563000 | 2x35W | 1497x248x102 | 461,60 |
| 474925463000 | 2x54W | 1197x248x102 | 405,40 |
| 474928063000 | 2x80W | 1497x248x102 | 485,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OID CEL) in-line ceiling-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and two fixtures for ceiling mounting, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 475022863000 | 2x28W | 1197x248x102 | 403,60 |
| 475023563000 | 2x35W | 1497x248x102 | 460,40 |
| 475025463000 | 2x54W | 1197x248x102 | 404,20 |
| 475028063000 | 2x80W | 1497x248x102 | 484,70 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Wall lighting fixtures with tilting laminated optics

Twin lamp lighting fixture (T5 OID CEL) single wall-mounting.

The fixtures are supplied with end heads, laminated optics, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 475122863000 | 2x28W | 1221x248x102 | 437,30 |
| 475123563000 | 2x35W | 1521x248x102 | 493,60 |
| 475125463000 | 2x54W | 1221x248x102 | 437,90 |
| 475128063000 | 2x80W | 1521x248x102 | 517,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OID CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and fixture for wall mounting, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|--------------|---------------|
| 475222863000 | 2x28W | 1197x248x102 | 431,90 |
| 475223563000 | 2x35W | 1497x248x102 | 488,70 |
| 475225463000 | 2x54W | 1197x248x102 | 432,50 |
| 475228063000 | 2x80W | 1497x248x102 | 513,00 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OID CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and fixture for wall mounting, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 475322863000 | 2x28W | 1197x248x102 | 430,70 |
| 475323563000 | 2x35W | 1497x248x102 | 487,50 |
| 475325463000 | 2x54W | 1197x248x102 | 431,30 |
| 475328063000 | 2x80W | 1497x248x102 | 511,80 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OIB CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optics, top clear polycarbonate diffusers, simple suspension system and electrified suspension with transparent wire 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 475422863000 | 2x28W | 1221x248x102 | 464,90 |
| 475423563000 | 2x35W | 1521x248x102 | 528,20 |
| 475425463000 | 2x54W | 1221x248x102 | 465,50 |
| 475428063000 | 2x80W | 1521x248x102 | 552,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OIB CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffusers, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm² without end heads.



| | | | |
|--------------|-------|--------------|---------------|
| 475522863000 | 2x28W | 1197x248x102 | 462,20 |
| 475523563000 | 2x35W | 1497x248x102 | 526,00 |
| 475525463000 | 2x54W | 1197x248x102 | 462,80 |
| 475528063000 | 2x80W | 1497x248x102 | 550,30 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OIB CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffusers, two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 475622863000 | 2x28W | 1197x248x102 | 454,70 |
| 475623563000 | 2x35W | 1497x248x102 | 518,50 |
| 475625463000 | 2x54W | 1197x248x102 | 455,30 |
| 475628063000 | 2x80W | 1497x248x102 | 542,80 |



Colour
embossed grey

MITOS

Design: FEB Rienzi

Wall lighting fixtures with tilting laminated optics

Twin lamp lighting fixture (T5 OIB CEL) single wall-mounting.

The fixtures are supplied with end heads, laminated optics, top clear polycarbonate diffusers, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 475722863000 | 2x28W | 1221x248x102 | 467,90 |
| 475723563000 | 2x35W | 1521x248x102 | 531,20 |
| 475725463000 | 2x54W | 1221x248x102 | 468,50 |
| 475728063000 | 2x80W | 1521x248x102 | 555,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OIB CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffusers, fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|--------------|---------------|
| 475822863000 | 2x28W | 1197x248x102 | 462,50 |
| 475823563000 | 2x35W | 1497x248x102 | 526,30 |
| 475825463000 | 2x54W | 1197x248x102 | 463,10 |
| 475828063000 | 2x80W | 1497x248x102 | 550,60 |



Colour
embossed grey

Twin lamp lighting fixture (T5 OIB CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffusers, fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|--------------|---------------|
| 475922863000 | 2x28W | 1197x248x102 | 461,30 |
| 475923563000 | 2x35W | 1497x248x102 | 525,10 |
| 475925463000 | 2x54W | 1197x248x102 | 461,90 |
| 475928063000 | 2x80W | 1497x248x102 | 549,40 |



Colour
embossed grey

End head twin lamp.

Die-cast aluminium, screws fixing.
To be mounted to the end lighting
fixtures of the line.



Code

479913163000



Size mm

12x248x54

Euro

8,60

Colour
embossed grey



Linear joint twin lamp.

Die-cast aluminium, screws fixing.
This feature creates a linear joint
between two lighting fixtures.



479993163000



12x248x54


8,30

Colour
embossed grey





Lighting fixtures for interiors. The TESIS-1 line of lighting fixtures includes a selection of models suspension, ceiling and wall mount, all are supplied with lamps type OSRAM T5 (Ø 16) colour code 840 and ready for installation without having to disassemble and then reassemble for mounting.



BODY

High-thickness aluminium profile die-cast aluminium end heads and joints.

DIFFUSER

Self-extinguishing two-component polycarbonate, satin finish opaline coloured.

OPTIC

Laminated specular aluminium 99.9 plated, anti-glare with low iridescence, low luminance and high efficiency.

COATING

Baked with epoxy powder paint, resistant to damp and UV ray stabilised.

MOUNTING

Suspension, ceiling or wall both in single and continuous wiring.

REGULATIONS

The product conforms to the governing standards EN 60598 concerning electrical safety and standards EN 55015 and EN 61000 concerning electromagnetic compatibility, grade of insulation protection IP40 for models with diffuser and IP20 for models with optic and which can be installed on inflammable surfaces.

WIRING

Power supply with electronic ballast TRIDONIC 230V 50/60Hz (alternative Osram and Helvar). Wire with a cross section 0,5 mm² insulated with PVC heat resistant up to 90°C conforming to standard CEI20-20/1 (HD21.1 S3) Polycarbonate lamp holders with phosphorus bronze contacts. Terminal block 2P+T manufactured in polycarbonate. 2,5A fuse. For the models to be installed in a continuous line snap-fit connectors are provided with wiring 3x1,5 mm² insulated with PVC-HT heat resistance up to 90° con-forming to standard CEI 20/20/1 (HD 21.1 s3).

POWER SUPPLY

SINGLE MOUNTING

PVC 3x0,75 mm² round transparent wire, internal cables heat resistant up to 90°C, protective covering heat resistant up to 105°C

IN-LINE MOUNTING

PVC 3x1,5 mm² round transparent wire, internal cables heat resistant up to 90°C, protective covering heat resistant up to 105°C.

MODEL UPON REQUEST

Wiring with digital dimmer electronic ballast, wiring with DALI dimmer electronic ballast, wiring to an emergency unit for continuous lighting up to 3 hours, special colour, specific lengths.

TESIS-1

Design: FEB Rienzi



TESIS-1

Design: FEB Rienzi

Suspension lighting fixtures with diffuser

Single lamp lighting fixture (T5 SDD CEL) single suspension-mounting.

The fixtures are supplied with end heads, diffuser, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 450012863000 | 1x28W | 1210x158x50 | 186,60 |
| 450013563000 | 1x35W | 1510x158x50 | 206,50 |
| 450015463000 | 1x54W | 1210x158x50 | 186,90 |
| 450018063000 | 1x80W | 1510x158x50 | 211,10 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDD CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 450112863000 | 1x28W | 1170x158x50 | 184,40 |
| 450113563000 | 1x35W | 1470x158x50 | 204,80 |
| 450115463000 | 1x54W | 1170x158x50 | 184,70 |
| 450118063000 | 1x80W | 1470x158x50 | 209,40 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDD CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 450212863000 | 1x28W | 1170x158x50 | 176,00 |
| 450213563000 | 1x35W | 1470x158x50 | 196,50 |
| 450215463000 | 1x54W | 1170x158x50 | 176,30 |
| 450218063000 | 1x80W | 1470x158x50 | 201,10 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Ceiling lighting fixtures with diffuser



Single lamp lighting fixture (T5 SDD CEL) single ceiling-mounting.

The fixtures are supplied with end heads, diffuser, two fixtures for mounting to ceiling and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 450312863000 | 1x28W | 1210x158x50 | 165,20 |
| 450313563000 | 1x35W | 1510x158x50 | 185,10 |
| 450315463000 | 1x54W | 1210x158x50 | 165,60 |
| 450318063000 | 1x80W | 1510x158x50 | 189,80 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDD CEL) in-line ceiling-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser, and two fixtures for mounting to without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 450412863000 | 1x28W | 1170x158x50 | 160,10 |
| 450413563000 | 1x35W | 1470x158x50 | 180,50 |
| 450415463000 | 1x54W | 1170x158x50 | 160,40 |
| 450418063000 | 1x80W | 1470x158x50 | 185,10 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDD CEL) in-line ceiling-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser, and two fixtures for mounting to without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 450512863000 | 1x28W | 1170x158x50 | 158,70 |
| 450513563000 | 1x35W | 1470x158x50 | 179,20 |
| 450515463000 | 1x54W | 1170x158x50 | 159,10 |
| 450518063000 | 1x80W | 1470x158x50 | 183,80 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Wall/shelf lighting fixtures with diffuser

Single lamp lighting fixture (T5 SDD CEL) single wall / shelf-mounting.

The fixtures are supplied with end heads, diffuser, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 450611463000 | 1x14W | 610x158x50 | 149,70 |
| 450612163000 | 1x21W | 910x158x50 | 169,60 |
| 450612863000 | 1x28W | 1210x158x50 | 200,40 |
| 450613563000 | 1x35W | 1510x158x50 | 220,30 |
| 450612463000 | 1x24W | 610x158x50 | 150,00 |
| 450613963000 | 1x39W | 910x158x50 | 170,00 |
| 450615463000 | 1x54W | 1210x158x50 | 200,80 |
| 450618063000 | 1x80W | 1510x158x50 | 225,00 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDD CEL) in-line wall / shelf-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser, and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 450712863000 | 1x28W | 1170x158x50 | 195,30 |
| 450713563000 | 1x35W | 1470x158x50 | 215,70 |
| 450715463000 | 1x54W | 1170x158x50 | 195,60 |
| 450718063000 | 1x80W | 1470x158x50 | 220,30 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDD CEL) in-line wall / shelf-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser, and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 450812863000 | 1x28W | 1170x158x50 | 193,90 |
| 450813563000 | 1x35W | 1470x158x50 | 214,40 |
| 450815463000 | 1x54W | 1170x158x50 | 194,30 |
| 450818063000 | 1x80W | 1470x158x50 | 219,00 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Suspension lighting fixtures with diffuser



Single lamp lighting fixture (T5 SDB CEL) single suspension-mounting.

The fixtures are supplied with end heads, diffuser, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wire 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 450912863000 | 1x28W | 1210x158x50 | 203,50 |
| 450913563000 | 1x35W | 1510x158x50 | 227,30 |
| 450915463000 | 1x54W | 1210x158x50 | 203,80 |
| 450918063000 | 1x80W | 1510x158x50 | 231,90 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDB CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm² without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 451012863000 | 1x28W | 1170x158x50 | 201,30 |
| 451013563000 | 1x35W | 1470x158x50 | 225,60 |
| 451015463000 | 1x54W | 1170x158x50 | 201,60 |
| 451018063000 | 1x80W | 1470x158x50 | 230,20 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDB CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser, top clear polycarbonate diffuser, and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 451112863000 | 1x28W | 1170x158x50 | 192,90 |
| 451113563000 | 1x35W | 1470x158x50 | 217,30 |
| 451115463000 | 1x54W | 1170x158x50 | 193,30 |
| 451118063000 | 1x80W | 1470x158x50 | 221,90 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Wall lighting fixtures with diffuser

Single lamp lighting fixture (T5 SDB CEL) single wall-mounting.

The fixtures are supplied with end heads, diffuser, top clear polycarbonate diffuser, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 451211463000 | 1x14W | 610x158x50 | 159,00 |
| 451212163000 | 1x21W | 910x158x50 | 182,70 |
| 451212863000 | 1x28W | 1210x158x50 | 217,40 |
| 451213563000 | 1x35W | 1510x158x50 | 241,10 |
| 451212463000 | 1x24W | 610x158x50 | 159,30 |
| 451213963000 | 1x39W | 910x158x50 | 183,00 |
| 451215463000 | 1x54W | 1210x158x50 | 217,70 |
| 451218063000 | 1x80W | 1510x158x50 | 245,70 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDB CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser, top clear polycarbonate diffuser, fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 451312863000 | 1x28W | 1170x158x50 | 212,20 |
| 451313563000 | 1x35W | 1470x158x50 | 236,50 |
| 451315463000 | 1x54W | 1170x158x50 | 212,50 |
| 451318063000 | 1x80W | 1470x158x50 | 241,10 |



Colour
embossed grey

Single lamp lighting fixture (T5 SDB CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffuser, top clear polycarbonate diffuser, fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 451412863000 | 1x28W | 1170x158x50 | 210,90 |
| 451413563000 | 1x35W | 1470x158x50 | 235,20 |
| 451415463000 | 1x54W | 1170x158x50 | 211,20 |
| 451418063000 | 1x80W | 1470x158x50 | 239,80 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Suspension lighting fixtures with laminated optic



Single lamp lighting fixture (T5 ODD CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optic, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 451512863000 | 1x28W | 1210x158x50 | 268,00 |
| 451513563000 | 1x35W | 1510x158x50 | 301,20 |
| 451515463000 | 1x54W | 1210x158x50 | 268,30 |
| 451518063000 | 1x80W | 1510x158x50 | 305,80 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODD CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, simple suspension system and electrified suspension with transparent wire 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 451612863000 | 1x28W | 1170x158x50 | 265,80 |
| 451613563000 | 1x35W | 1470x158x50 | 299,50 |
| 451615463000 | 1x54W | 1170x158x50 | 266,10 |
| 451618063000 | 1x80W | 1470x158x50 | 304,20 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODD CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 451712863000 | 1x28W | 1170x158x50 | 257,40 |
| 451713563000 | 1x35W | 1470x158x50 | 291,20 |
| 451715463000 | 1x54W | 1170x158x50 | 257,70 |
| 451718063000 | 1x80W | 1470x158x50 | 295,80 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Ceiling lighting fixtures with laminated optic

Single lamp lighting fixture (T5 ODD CEL) single ceiling-mounting.

The fixtures are supplied with end heads, laminated optic, two fixtures for mounting to ceiling and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 451812863000 | 1x28W | 1210x158x50 | 246,60 |
| 451813563000 | 1x35W | 1510x158x50 | 279,80 |
| 451815463000 | 1x54W | 1210x158x50 | 247,00 |
| 451818063000 | 1x80W | 1510x158x50 | 284,50 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODD CEL) in-line ceiling-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and two fixtures for mounting to ceiling, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 451912863000 | 1x28W | 1170x158x50 | 241,50 |
| 451913563000 | 1x35W | 1470x158x50 | 275,20 |
| 451915463000 | 1x54W | 1170x158x50 | 241,80 |
| 451918063000 | 1x80W | 1470x158x50 | 279,80 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODD CEL) in-line ceiling-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and two fixtures for mounting to ceiling, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 452012863000 | 1x28W | 1170x158x50 | 240,10 |
| 452013563000 | 1x35W | 1470x158x50 | 273,90 |
| 452015463000 | 1x54W | 1170x158x50 | 240,50 |
| 452018063000 | 1x80W | 1470x158x50 | 278,50 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Wall/shelf lighting fixtures with laminated optic



Single lamp lighting fixture (T5 ODD CEL) single wall / shelf-mounting.

The fixtures are supplied with end heads, laminated optic, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 452111463000 | 1x14W | 610x158x50 | 194,00 |
| 452112163000 | 1x21W | 910x158x50 | 234,70 |
| 452112863000 | 1x28W | 1210x158x50 | 281,80 |
| 452113563000 | 1x35W | 1510x158x50 | 315,00 |
| 452112463000 | 1x24W | 610x158x50 | 194,40 |
| 452113963000 | 1x39W | 910x158x50 | 235,10 |
| 452115463000 | 1x54W | 1210x158x50 | 282,20 |
| 452118063000 | 1x80W | 1510x158x50 | 319,70 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODD CEL) in-line wall / shelf-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 452212863000 | 1x28W | 1170x158x50 | 276,70 |
| 452213563000 | 1x35W | 1470x158x50 | 310,40 |
| 452215463000 | 1x54W | 1170x158x50 | 277,00 |
| 452218063000 | 1x80W | 1470x158x50 | 315,00 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODD CEL) in-line wall / shelf-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 452312863000 | 1x28W | 1170x158x50 | 275,30 |
| 452313563000 | 1x35W | 1470x158x50 | 309,10 |
| 452315463000 | 1x54W | 1170x158x50 | 275,70 |
| 452318063000 | 1x80W | 1470x158x50 | 313,70 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Suspension lighting fixtures with laminated optic

Single lamp lighting fixture (T5 ODB CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optic, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wire 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 452412863000 | 1x28W | 1210x158x50 | 284,90 |
| 452413563000 | 1x35W | 1510x158x50 | 322,00 |
| 452415463000 | 1x54W | 1210x158x50 | 285,20 |
| 452418063000 | 1x80W | 1510x158x50 | 326,60 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODB CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm² without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 452512863000 | 1x28W | 1170x158x50 | 282,70 |
| 452513563000 | 1x35W | 1470x158x50 | 320,30 |
| 452515463000 | 1x54W | 1170x158x50 | 283,00 |
| 452518063000 | 1x80W | 1470x158x50 | 324,90 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODB CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, top clear polycarbonate diffuser and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 452612863000 | 1x28W | 1170x158x50 | 274,30 |
| 452613563000 | 1x35W | 1470x158x50 | 312,00 |
| 452615463000 | 1x54W | 1170x158x50 | 274,70 |
| 452618063000 | 1x80W | 1470x158x50 | 316,60 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Wall lighting fixtures with laminated optic



Single lamp lighting fixture (T5 ODB CEL) single wall-mounting.

The fixtures are supplied with end heads, laminated optic, top clear polycarbonate diffuser, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 452711463000 | 1x14W | 610x158x50 | 203,30 |
| 452712163000 | 1x21W | 910x158x50 | 247,80 |
| 452712863000 | 1x28W | 1210x158x50 | 298,80 |
| 452713563000 | 1x35W | 1510x158x50 | 335,80 |
| 452712463000 | 1x24W | 610x158x50 | 203,60 |
| 452713963000 | 1x39W | 910x158x50 | 248,20 |
| 452715463000 | 1x54W | 1210x158x50 | 299,10 |
| 452718063000 | 1x80W | 1510x158x50 | 340,50 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODB CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, top clear polycarbonate diffuser and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 452812863000 | 1x28W | 1170x158x50 | 293,60 |
| 452813563000 | 1x35W | 1470x158x50 | 331,20 |
| 452815463000 | 1x54W | 1170x158x50 | 293,90 |
| 452818063000 | 1x80W | 1470x158x50 | 335,80 |



Colour
embossed grey

Single lamp lighting fixture (T5 ODB CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optic, top clear polycarbonate diffuser and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 452912863000 | 1x28W | 1170x158x50 | 292,30 |
| 452913563000 | 1x35W | 1470x158x50 | 329,90 |
| 452915463000 | 1x54W | 1170x158x50 | 292,60 |
| 452918063000 | 1x80W | 1470x158x50 | 334,50 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Suspension lighting fixtures indirect lighting only

Single lamp lighting fixture (T5 LSI CEL) single suspension-mounting.

The fixtures are supplied with end heads, diffuser, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 453012863000 | 1x28W | 1210x158x50 | 208,20 |
| 453013563000 | 1x35W | 1510x158x50 | 233,20 |
| 453015463000 | 1x54W | 1210x158x50 | 208,60 |
| 453018063000 | 1x80W | 1510x158x50 | 237,80 |



Colour
embossed grey

Single lamp lighting fixture (T5 LSI CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 453112863000 | 1x28W | 1170x158x50 | 206,00 |
| 453113563000 | 1x35W | 1470x158x50 | 231,60 |
| 453115463000 | 1x54W | 1170x158x50 | 206,40 |
| 453118063000 | 1x80W | 1470x158x50 | 236,20 |



Colour
embossed grey

Single lamp lighting fixture (T5 LSI CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, top clear polycarbonate diffuser and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 453212863000 | 1x28W | 1170x158x50 | 197,70 |
| 453213563000 | 1x35W | 1470x158x50 | 223,20 |
| 453215463000 | 1x54W | 1170x158x50 | 198,00 |
| 453218063000 | 1x80W | 1470x158x50 | 227,80 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Wall lighting fixtures indirect lighting only



Single lamp lighting fixture (T5 LSI CEL) single wall-mounting.

The fixtures are supplied with end heads, top clear polycarbonate diffuser, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 453311463000 | 1x14W | 610x158x50 | 161,30 |
| 453312163000 | 1x21W | 910x158x50 | 186,20 |
| 453312863000 | 1x28W | 1210x158x50 | 222,10 |
| 453313563000 | 1x35W | 1510x158x50 | 247,10 |
| 453312463000 | 1x24W | 610x158x50 | 161,60 |
| 453313963000 | 1x39W | 910x158x50 | 186,60 |
| 453315463000 | 1x54W | 1210x158x50 | 222,40 |
| 453318063000 | 1x80W | 1510x158x50 | 251,70 |



Colour
embossed grey

Single lamp lighting fixture (T5 LSI CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, top clear polycarbonate diffuser and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 453412863000 | 1x28W | 1170x158x50 | 216,90 |
| 453413563000 | 1x35W | 1470x158x50 | 242,40 |
| 453415463000 | 1x54W | 1170x158x50 | 217,30 |
| 453418063000 | 1x80W | 1470x158x50 | 247,10 |



Colour
embossed grey

Single lamp lighting fixture (T5 LSI CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, top clear polycarbonate diffuser and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 453512863000 | 1x28W | 1170x158x50 | 215,60 |
| 453513563000 | 1x35W | 1470x158x50 | 241,10 |
| 453515463000 | 1x54W | 1170x158x50 | 215,90 |
| 453518063000 | 1x80W | 1470x158x50 | 245,70 |



Colour
embossed grey

TESIS-1

Design: FEB Rienzi

Accessories

End head.

Die-cast aluminium, screws fixing.
To be mounted to the end lighting
fixtures of the line.



Code

459912163000



Size mm

20x158x50

Euro

9,00

Colour
embossed grey



Linear joint.

Die-cast aluminium, screws fixing.
This feature creates a linear joint
between two lighting fixtures.



459992163000



20x158x50


7,80

Colour
embossed grey





Lighting fixtures for interiors.
The TESIS-2 line of lighting fixtures includes a selection of models suspension, ceiling, and wall, all are supplied with lamps type OSRAM T5 (Ø 16) colour code 840 and are ready for installation without having to disassemble and reassemble for installation.



BODY

High-thickness aluminium profile die-cast aluminium end heads and joints.

DIFFUSERS

Self-extinguishing two-component polycarbonate, satin finish, opaline coloured.

OPTICS

Laminated specular aluminium 99.9 plated, anti-glare with low iridescence, low luminance and high efficiency.

COATING

Baked with epoxy powder paint, resistant to damp and UV ray stabilised.

MOUNTING

Suspension, ceiling or wall both in single and continuous wiring.

REGULATIONS

The product conforms to the governing standards EN 60598 concerning electrical safety and standards EN 55015 and EN 61000 concerning electromagnetic compatibility, grade of insulation protection IP40 for models with diffuser and IP20 for models with optic and which can be installed on inflammable surfaces.

WIRING

Power supply with electronic ballast TRIDONIC 230V 50/60Hz (alternative Osram and Helvar). Wire with a cross section 0,5 mm² insulated with PVC heat resistant up to 90°C conforming to standard CEI20-20/1 (HD21.1 S3) Polycarbonate lamp holders with phosphorus bronze contacts. Terminal block 2P+T manufactured in polycarbonate. 2.5A fuse. For the models to be installed in a continuous line snap-fit connectors are provided with wiring 3x1,5 mm² insulated with PVC-HT heat resistance up to 90° conforming to standard CEI 20/20/1 (HD 21.1 s3).

POWER SUPPLY

SINGLE MOUNTING
 PVC 3x0,75 mm² round transparent wire, internal cables heat resistant up to 90°C, protective covering heat resistant up to 105°C
IN-LINE MOUNTING
 PVC 3x1,5 mm² round transparent wire, internal cables heat resistant up to 90°C, protective covering heat resistant up to 105°C.

MODEL UPON REQUEST

Wiring with digital dimmer electronic ballast, wiring with DALI dimmer electronic ballast, wiring to an emergency unit for continuous lighting up to 3 hours, special colour, specific lengths.

TESIS-2

Design: FEB Rienzi



TESIS-2

Design: FEB Rienzi

Suspension lighting fixtures with diffusers

Twin lamp lighting fixture (T5 SDD CEL) single suspension-mounting.

The fixtures are supplied with end heads, diffusers, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 460022863000 | 2x28W | 1210x298x50 | 259,60 |
| 460023563000 | 2x35W | 1510x298x50 | 292,40 |
| 460025463000 | 2x54W | 1210x298x50 | 260,20 |
| 460028063000 | 2x80W | 1510x298x50 | 318,30 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 460122863000 | 2x28W | 1170x298x50 | 254,90 |
| 460123563000 | 2x35W | 1470x298x50 | 288,30 |
| 460125463000 | 2x54W | 1170x298x50 | 255,60 |
| 460128063000 | 2x80W | 1470x298x50 | 314,20 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 460222863000 | 2x28W | 1170x298x50 | 246,90 |
| 460223563000 | 2x35W | 1470x298x50 | 280,20 |
| 460225463000 | 2x54W | 1170x298x50 | 247,50 |
| 460228063000 | 2x80W | 1470x298x50 | 306,10 |



Colour
embossed grey

TESIS-2


Design: FEB Rienzi

Ceiling lighting fixtures with diffusers



Twin lamp lighting fixture (T5 SDD CEL) single ceiling-mounting.

The fixtures are supplied with end heads, diffusers, two fixtures for mounting to ceiling and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.

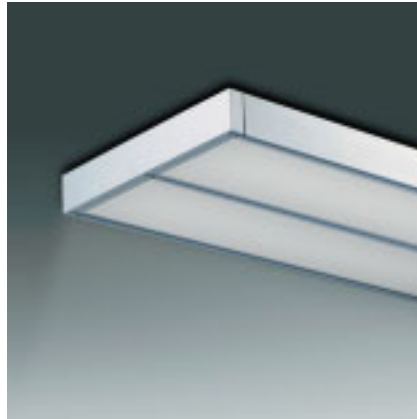

| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 460322863000 | 2x28W | 1210x298x50 | 237,70 |
| 460323563000 | 2x35W | 1510x298x50 | 270,60 |
| 460325463000 | 2x54W | 1210x298x50 | 238,40 |
| 460328063000 | 2x80W | 1510x298x50 | 296,30 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line ceiling-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and two fixtures for mounting to ceiling, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 460422863000 | 2x28W | 1170x298x50 | 230,20 |
| 460423563000 | 2x35W | 1470x298x50 | 263,60 |
| 460425463000 | 2x54W | 1170x298x50 | 230,80 |
| 460428063000 | 2x80W | 1470x298x50 | 289,30 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line ceiling-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and two fixtures for mounting to ceiling, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 460522863000 | 2x28W | 1170x298x50 | 228,90 |
| 460523563000 | 2x35W | 1470x298x50 | 262,30 |
| 460525463000 | 2x54W | 1170x298x50 | 229,50 |
| 460528063000 | 2x80W | 1470x298x50 | 288,00 |



Colour
embossed grey


TESIS-2

Design: FEB Rienzi

Wall/shelf lighting fixtures with diffusers

Twin lamp lighting fixture (T5 SDD CEL) single wall / shelf-mounting.

The fixtures are supplied with end heads, diffusers, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.

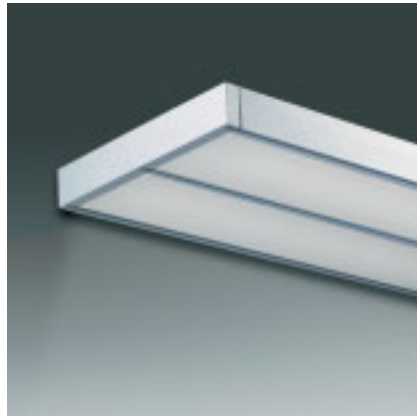

| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 460621463000 | 2x14W | 610x298x50 | 195,10 |
| 460622163000 | 2x21W | 910x298x50 | 228,00 |
| 460622863000 | 2x28W | 1210x298x50 | 271,30 |
| 460623563000 | 2x35W | 1510x298x50 | 304,20 |
| 460622463000 | 2x24W | 610x298x50 | 195,70 |
| 460623963000 | 2x39W | 910x298x50 | 228,60 |
| 460625463000 | 2x54W | 1210x298x50 | 272,00 |
| 460628063000 | 2x80W | 1510x298x50 | 329,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line wall / shelf-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 460722863000 | 2x28W | 1170x298x50 | 263,80 |
| 460723563000 | 2x35W | 1470x298x50 | 297,20 |
| 460725463000 | 2x54W | 1170x298x50 | 264,40 |
| 460728063000 | 2x80W | 1470x298x50 | 322,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDD CEL) in-line wall / shelf-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 460822863000 | 2x28W | 1170x298x50 | 262,50 |
| 460823563000 | 2x35W | 1470x298x50 | 295,90 |
| 460825463000 | 2x54W | 1170x298x50 | 263,10 |
| 460828063000 | 2x80W | 1470x298x50 | 321,60 |



Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Suspension lighting fixtures with diffusers



Twin lamp lighting fixture (T5 SDB CEL) single suspension-mounting.

The fixtures are supplied with end heads, diffusers, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wire 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 460922863000 | 2x28W | 1210x298x50 | 288,50 |
| 460923563000 | 2x35W | 1510x298x50 | 328,80 |
| 460925463000 | 2x54W | 1210x298x50 | 289,20 |
| 460928063000 | 2x80W | 1510x298x50 | 354,60 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDB CEL) in-line suspension-mountin with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm² without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 461022863000 | 2x28W | 1170x298x50 | 283,90 |
| 461023563000 | 2x35W | 1470x298x50 | 324,70 |
| 461025463000 | 2x54W | 1170x298x50 | 284,60 |
| 461028063000 | 2x80W | 1470x298x50 | 350,50 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDB CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffuser, and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 461122863000 | 2x28W | 1170x298x50 | 275,80 |
| 461123563000 | 2x35W | 1470x298x50 | 316,60 |
| 461125463000 | 2x54W | 1170x298x50 | 276,50 |
| 461128063000 | 2x80W | 1470x298x50 | 342,40 |



Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Wall lighting fixtures with diffusers

Twin lamp lighting fixture (T5 SDB CEL) single wall-mounting.

The fixtures are supplied with end heads, diffusers, top clear polycarbonate diffuser, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 461222163000 | 2x21W | 910x298x50 | 249,60 |
| 461222863000 | 2x28W | 1210x298x50 | 300,30 |
| 461223563000 | 2x35W | 1510x298x50 | 340,50 |
| 461223963000 | 2x39W | 910x298x50 | 250,20 |
| 461225463000 | 2x54W | 1210x298x50 | 300,90 |
| 461228063000 | 2x80W | 1510x298x50 | 366,20 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDB CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffuser, fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 461322863000 | 2x28W | 1170x298x50 | 292,70 |
| 461323563000 | 2x35W | 1470x298x50 | 333,50 |
| 461325463000 | 2x54W | 1170x298x50 | 293,40 |
| 461328063000 | 2x80W | 1470x298x50 | 359,20 |



Colour
embossed grey

Twin lamp lighting fixture (T5 SDB CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, diffusers, top clear polycarbonate diffuser, fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 461422863000 | 2x28W | 1170x298x50 | 291,50 |
| 461423563000 | 2x35W | 1470x298x50 | 332,20 |
| 461425463000 | 2x54W | 1170x298x50 | 292,10 |
| 461428063000 | 2x80W | 1470x298x50 | 357,90 |




Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Suspension lighting fixtures with laminated optics

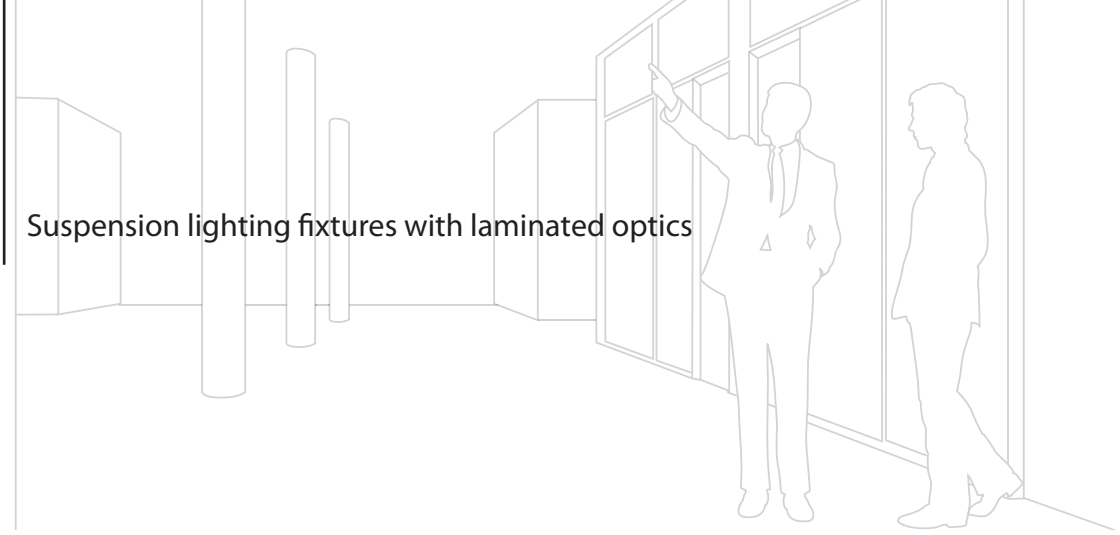

Twin lamp lighting fixture (T5 ODD CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optics, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 461522863000 | 2x28W | 1210x298x50 | 414,60 |
| 461523563000 | 2x35W | 1510x298x50 | 472,80 |
| 461525463000 | 2x54W | 1210x298x50 | 415,30 |
| 461528063000 | 2x80W | 1510x298x50 | 498,60 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, simple suspension system and electrified suspension with transparent wire 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 461622863000 | 2x28W | 1170x298x50 | 410,00 |
| 461623563000 | 2x35W | 1470x298x50 | 468,70 |
| 461625463000 | 2x54W | 1170x298x50 | 410,70 |
| 461628063000 | 2x80W | 1470x298x50 | 494,60 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 461722863000 | 2x28W | 1170x298x50 | 401,90 |
| 461723563000 | 2x35W | 1470x298x50 | 460,60 |
| 461725463000 | 2x54W | 1170x298x50 | 402,60 |
| 461728063000 | 2x80W | 1470x298x50 | 486,50 |



Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Ceiling lighting fixtures with laminated optics

Twin lamp lighting fixture (T5 ODD CEL) single ceiling-mounting.

The fixtures are supplied with end heads, laminated optics, two fixtures for mounting to ceiling and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 461822863000 | 2x28W | 1210x298x50 | 392,80 |
| 461823563000 | 2x35W | 1510x298x50 | 451,00 |
| 461825463000 | 2x54W | 1210x298x50 | 393,40 |
| 461828063000 | 2x80W | 1510x298x50 | 476,70 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line ceiling-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and two fixtures for ceiling mounting, ceiling, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 461922863000 | 2x28W | 1170x298x50 | 385,20 |
| 461923563000 | 2x35W | 1470x298x50 | 443,90 |
| 461925463000 | 2x54W | 1170x298x50 | 385,90 |
| 461928063000 | 2x80W | 1470x298x50 | 469,70 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODD CEL) in-line ceiling-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and two fixtures for ceiling mounting, ceiling, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 462022863000 | 2x28W | 1170x298x50 | 384,00 |
| 462023563000 | 2x35W | 1470x298x50 | 442,70 |
| 462025463000 | 2x54W | 1170x298x50 | 384,60 |
| 462028063000 | 2x80W | 1470x298x50 | 468,40 |



Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Wall/shelf lighting fixtures with laminated optics



Twin lamp lighting fixture (T5 ODD CEL) single wall / shelf-mounting.

The fixtures are supplied with end heads, laminated optics, fixture wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.

| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 462121463000 | 2x14W | 610x298x50 | 279,60 |
| 462122163000 | 2x21W | 910x298x50 | 352,00 |
| 462122863000 | 2x28W | 1210x298x50 | 426,40 |
| 462123563000 | 2x35W | 1510x298x50 | 484,60 |
| 462122463000 | 2x24W | 610x298x50 | 280,20 |
| 462123963000 | 2x39W | 910x298x50 | 352,60 |
| 462125463000 | 2x54W | 1210x298x50 | 427,00 |
| 462128063000 | 2x80W | 1510x298x50 | 510,30 |



Colour
embossed grey



Twin lamp lighting fixture (T5 ODD CEL) in-line wall / shelf-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and fixture for wall mounting, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.

| | | | |
|--------------|-------|-------------|---------------|
| 462222863000 | 2x28W | 1170x298x50 | 418,80 |
| 462223563000 | 2x35W | 1470x298x50 | 477,50 |
| 462225463000 | 2x54W | 1170x298x50 | 419,50 |
| 462228063000 | 2x80W | 1470x298x50 | 503,30 |



Colour
embossed grey



Twin lamp lighting fixture (T5 ODD CEL) in-line wall / shelf-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics and fixture for wall mounting, without end heads. To be used only together with the model provided with power supply.

| | | | |
|--------------|-------|-------------|---------------|
| 462322863000 | 2x28W | 1170x298x50 | 417,60 |
| 462323563000 | 2x35W | 1470x298x50 | 476,30 |
| 462325463000 | 2x54W | 1170x298x50 | 418,20 |
| 462328063000 | 2x80W | 1470x298x50 | 502,00 |



Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Suspension lighting fixtures with laminated optics

Twin lamp lighting fixture (T5 ODB CEL) single suspension-mounting.

The fixtures are supplied with end heads, laminated optics, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 462422863000 | 2x28W | 1210x298x50 | 443,60 |
| 462423563000 | 2x35W | 1510x298x50 | 509,10 |
| 462425463000 | 2x54W | 1210x298x50 | 444,30 |
| 462428063000 | 2x80W | 1510x298x50 | 535,00 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODB CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wiring 3x1,5 mm² without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 462522863000 | 2x28W | 1170x298x50 | 439,00 |
| 462523563000 | 2x35W | 1470x298x50 | 505,10 |
| 462525463000 | 2x54W | 1170x298x50 | 439,60 |
| 462528063000 | 2x80W | 1470x298x50 | 530,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODB CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffuser, and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 462622863000 | 2x28W | 1170x298x50 | 430,90 |
| 462623563000 | 2x35W | 1470x298x50 | 497,00 |
| 462625463000 | 2x54W | 1170x298x50 | 431,60 |
| 462628063000 | 2x80W | 1470x298x50 | 522,80 |




Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Wall lighting fixtures with laminated optics

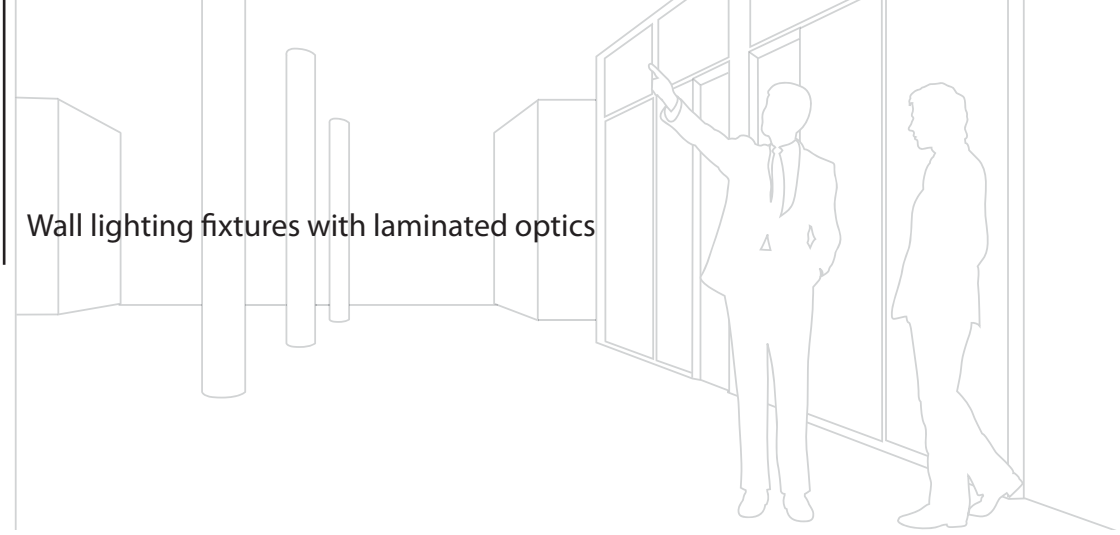

Twin lamp lighting fixture (T5 ODB CEL) single wall-mounting.

The fixtures are supplied with end heads, laminated optics, top clear polycarbonate diffuser, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 462722163000 | 2x21W | 910x298x50 | 373,60 |
| 462722863000 | 2x28W | 1210x298x50 | 455,40 |
| 462723563000 | 2x35W | 1510x298x50 | 520,90 |
| 462723963000 | 2x39W | 910x298x50 | 374,20 |
| 462725463000 | 2x54W | 1210x298x50 | 456,00 |
| 462728063000 | 2x80W | 1510x298x50 | 546,60 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODB CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffuser, fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 462822863000 | 2x28W | 1170x298x50 | 447,80 |
| 462823563000 | 2x35W | 1470x298x50 | 513,90 |
| 462825463000 | 2x54W | 1170x298x50 | 448,50 |
| 462828063000 | 2x80W | 1470x298x50 | 539,60 |



Colour
embossed grey

Twin lamp lighting fixture (T5 ODB CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, laminated optics, top clear polycarbonate diffuser, fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 462922863000 | 2x28W | 1170x298x50 | 446,60 |
| 462923563000 | 2x35W | 1470x298x50 | 512,60 |
| 462925463000 | 2x54W | 1170x298x50 | 447,20 |
| 462928063000 | 2x80W | 1470x298x50 | 538,30 |



Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Suspension lighting fixtures indirect lighting only

Twin lamp lighting fixture (T5 LSI CEL) single suspension-mounting.

The fixtures are supplied with end heads, top clear polycarbonate diffuser, simple suspension system and electrified suspension with transparent wiring 3x0,75 mm².



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 463022863000 | 2x28W | 1210x298x50 | 297,80 |
| 463023563000 | 2x35W | 1510x298x50 | 340,20 |
| 463025463000 | 2x54W | 1210x298x50 | 298,40 |
| 463028063000 | 2x80W | 1510x298x50 | 366,00 |



Colour
embossed grey

Twin lamp lighting fixture (T5 LSI CEL) in-line suspension-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, top clear polycarbonate diffuser, and electrified suspension with transparent wiring 3x1,5 mm², without end heads.



| | | | |
|--------------|-------|-------------|---------------|
| 463122863000 | 2x28W | 1170x298x50 | 293,20 |
| 463123563000 | 2x35W | 1470x298x50 | 336,10 |
| 463125463000 | 2x54W | 1170x298x50 | 293,80 |
| 463128063000 | 2x80W | 1470x298x50 | 361,90 |



Colour
embossed grey

Twin lamp lighting fixture (T5 LSI CEL) in-line suspension-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, top clear polycarbonate diffuser and two simple suspension systems, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 463222863000 | 2x28W | 1170x298x50 | 285,10 |
| 463223563000 | 2x35W | 1470x298x50 | 328,00 |
| 463225463000 | 2x54W | 1170x298x50 | 285,70 |
| 463228063000 | 2x80W | 1470x298x50 | 353,90 |



Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Wall lighting fixtures indirect lighting only



Twin lamp lighting fixture (T5 LSI CEL) single wall-mounting.

The fixtures are supplied with end heads, top clear polycarbonate diffuser, fixture for wall mounting and external power supply cable 3x0,75 mm², provided with snap-fit connectors to connect power supply and fixture.



| Code | Wattage | Size mm | Euro |
|--------------|---------|-------------|---------------|
| 463322163000 | 2x21W | 910x298x50 | 256,60 |
| 463322863000 | 2x28W | 1210x298x50 | 309,50 |
| 463323563000 | 2x35W | 1510x298x50 | 352,00 |
| 463323963000 | 2x39W | 910x298x50 | 257,30 |
| 463325463000 | 2x54W | 1210x298x50 | 310,20 |
| 463328063000 | 2x80W | 1510x298x50 | 377,70 |



Colour
embossed grey

Twin lamp lighting fixture (T5 LSI CEL) in-line wall-mounting with supply.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, top clear polycarbonate diffuser and fixture for mounting to wall, without end heads. External power supply cable 3x1,5 mm² provided with snap-fit connectors to connect power supply and fixture.



| | | | |
|--------------|-------|-------------|---------------|
| 463422863000 | 2x28W | 1170x298x50 | 302,00 |
| 463423563000 | 2x35W | 1470x298x50 | 344,90 |
| 463425463000 | 2x54W | 1170x298x50 | 302,60 |
| 463428063000 | 2x80W | 1470x298x50 | 370,70 |



Colour
embossed grey

Twin lamp lighting fixture (T5 LSI CEL) in-line wall-mounting.

The fixtures are supplied with a continuous line 3x1,5 mm² provided with snap-fit connectors, top clear polycarbonate diffuser and fixture for mounting to wall, without end heads. To be used only together with the model provided with power supply.



| | | | |
|--------------|-------|-------------|---------------|
| 463522863000 | 2x28W | 1170x298x50 | 300,70 |
| 463523563000 | 2x35W | 1470x298x50 | 343,70 |
| 463525463000 | 2x54W | 1170x298x50 | 301,40 |
| 463528063000 | 2x80W | 1470x298x50 | 369,40 |



Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Accessories

End head.

Die-cast aluminium, screws fixing.
To be mounted to the end lighting
fixtures of the line.



Code

469912163000



Size mm

20x298x50

Euro

10,10

Colour
embossed grey



Linear joint.

Die-cast aluminium, screws fixing.
This feature creates a linear joint
between two lighting fixtures.



469992163000



20x298x50


8,80

Colour
embossed grey



TESIS-2

Design: FEB Rienzi

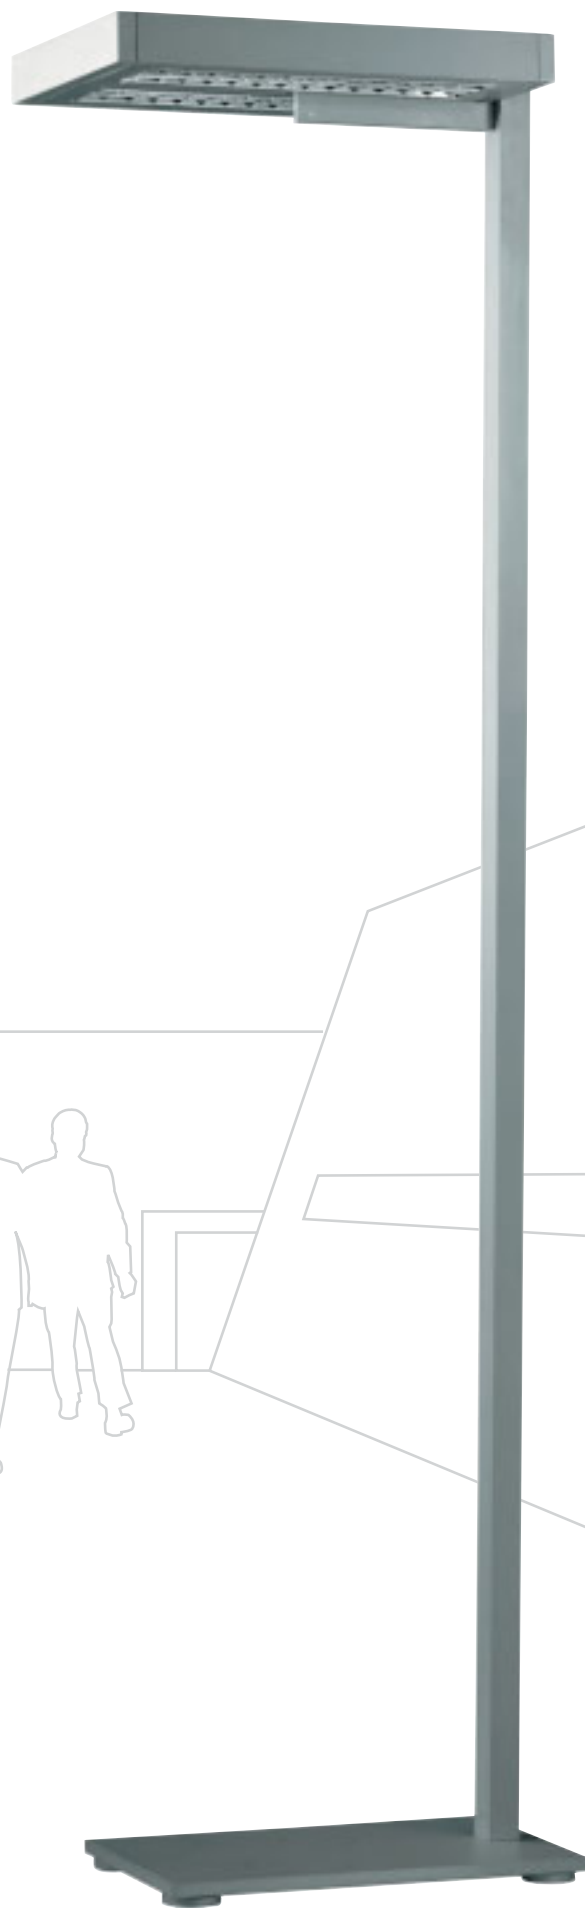

TESIS-2

Design: FEB Rienzi

Floor lamps

Twin lamp floor lamp (SDD CEL) direct lighting only.

The fixtures are supplied with diffusers, power supply cable with plug 2x10A+T, floor on/off switch, lamp OSRAM colour code 840.



| Code | Wattage | Size mm | Euro |
|--------------|---------|--------------|---------------|
| 468023663000 | 2x36W | 505x298x1900 | 481,80 |
| 468025563000 | 2x55W | 635x298x1900 | 496,40 |



Colour
embossed grey

Twin lamp floor lamp (ODD CEL) direct lighting only.

The fixtures are supplied with laminated optics, power supply cable with plug 2x10A+T, floor on/off switch, lamps OSRAM colour code 840.



| | | | |
|--------------|-------|--------------|---------------|
| 468123663000 | 2x36W | 505x298x1900 | 548,10 |
| 468125563000 | 2x55W | 635x298x1900 | 579,60 |



Colour
embossed grey

Twin lamp floor lamp (SDB CEL) direct and indirect lighting.

The fixtures are supplied with diffusers, top clear polycarbonate diffuser, power supply cable with plug 2x10A+T, floor on/off switch, lamps OSRAM colour code 840.



| | | | |
|--------------|-------|--------------|---------------|
| 468223663000 | 2x36W | 505x298x1900 | 492,00 |
| 468225563000 | 2x55W | 635x298x1900 | 508,70 |



Colour
embossed grey

TESIS-2

Design: FEB Rienzi

Floor lamps



| Code | Wattage | Size mm | Euro |
|------|---------|---------|------|
|------|---------|---------|------|

| | | | |
|--------------|-------|--------------|---------------|
| 468323663000 | 2x36W | 505x298x1900 | 560,40 |
| 468325563000 | 2x55W | 635x298x1900 | 594,30 |

Twin lamp floor lamp (ODB CEL) direct and indirect lighting.

The fixtures are supplied with laminated optics, top clear polycarbonate diffuser, power supply cable with plug 2x10A+T, floor on/off switch, lamps OSRAM colour code 840.



Colour
embossed grey

Twin lamp floor lamp (LSI CEL) indirect lighting only.

The fixtures are supplied with top clear polycarbonate diffuser, power supply cable with plug 2x10A+T, floor on/off switch, lamps OSRAM colour code 840.





| | | | |
|--------------|-------|--------------|---------------|
| 468423663000 | 2x36W | 505x298x1900 | 497,60 |
| 468425563000 | 2x55W | 635x298x1900 | 515,30 |



Colour
embossed grey

NOTES

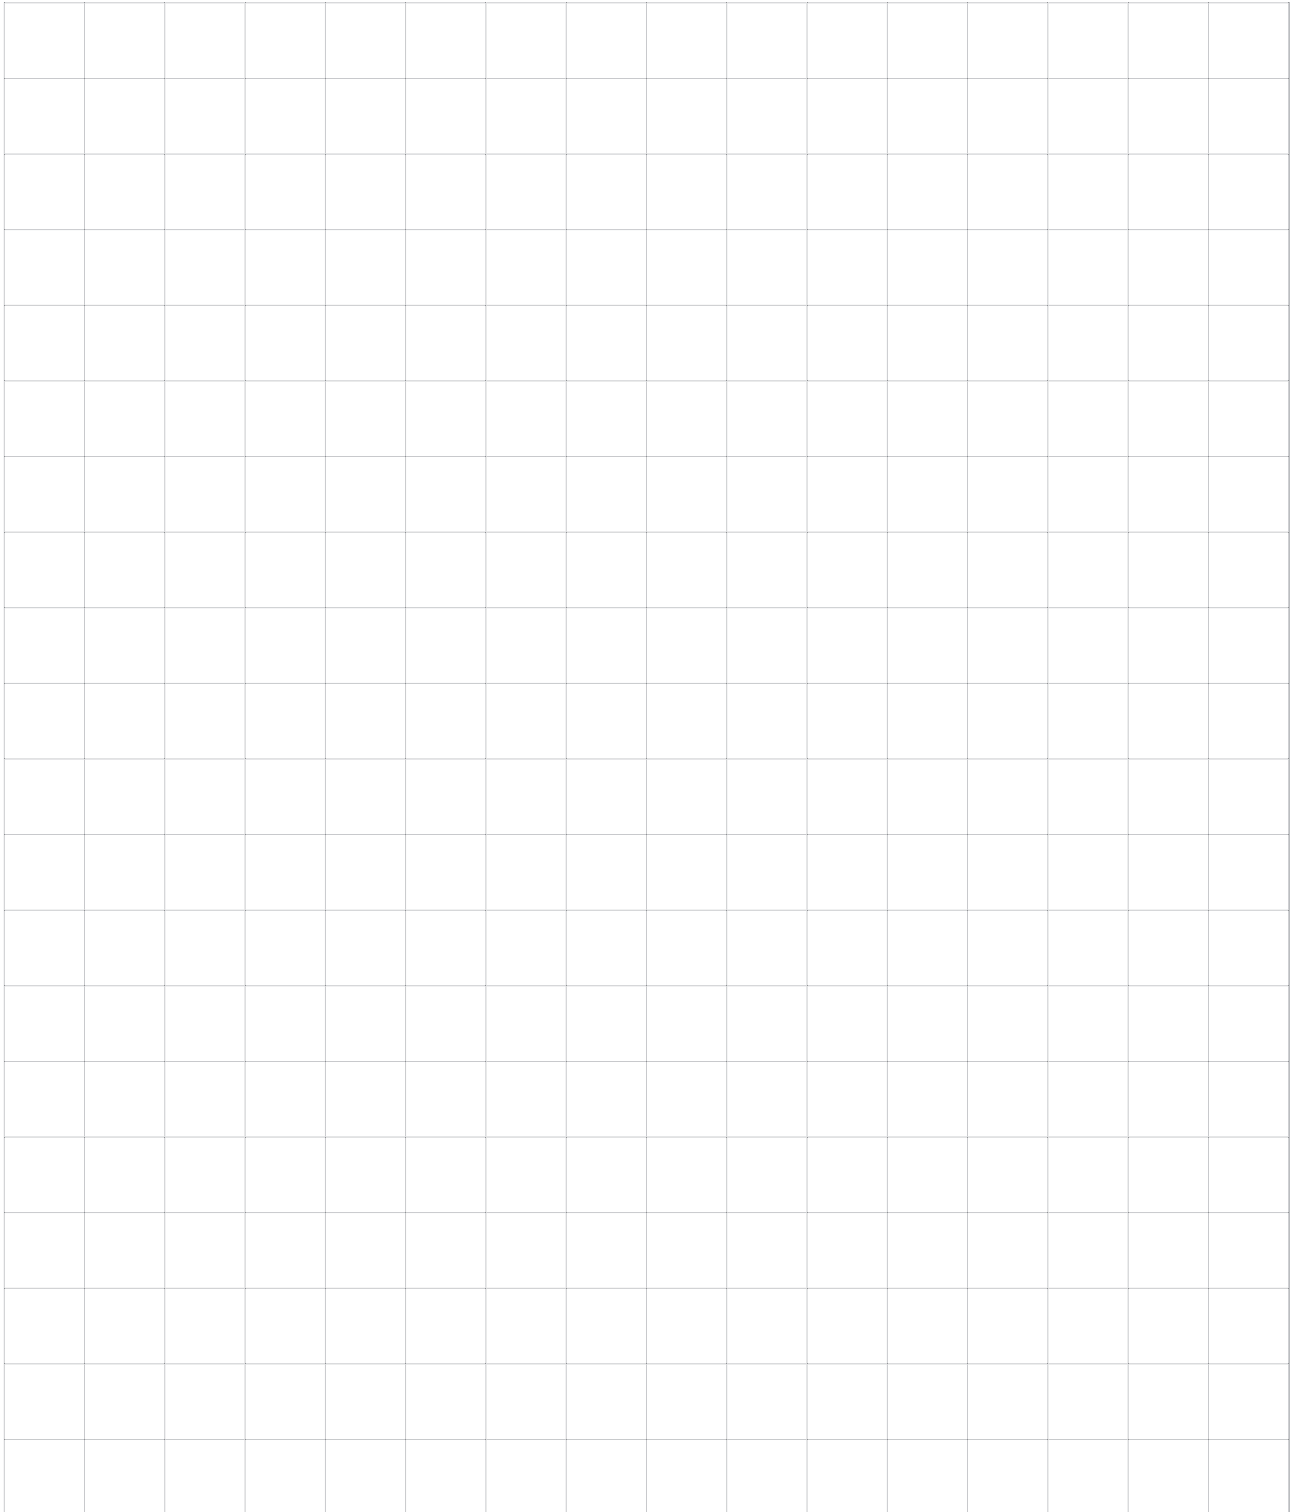

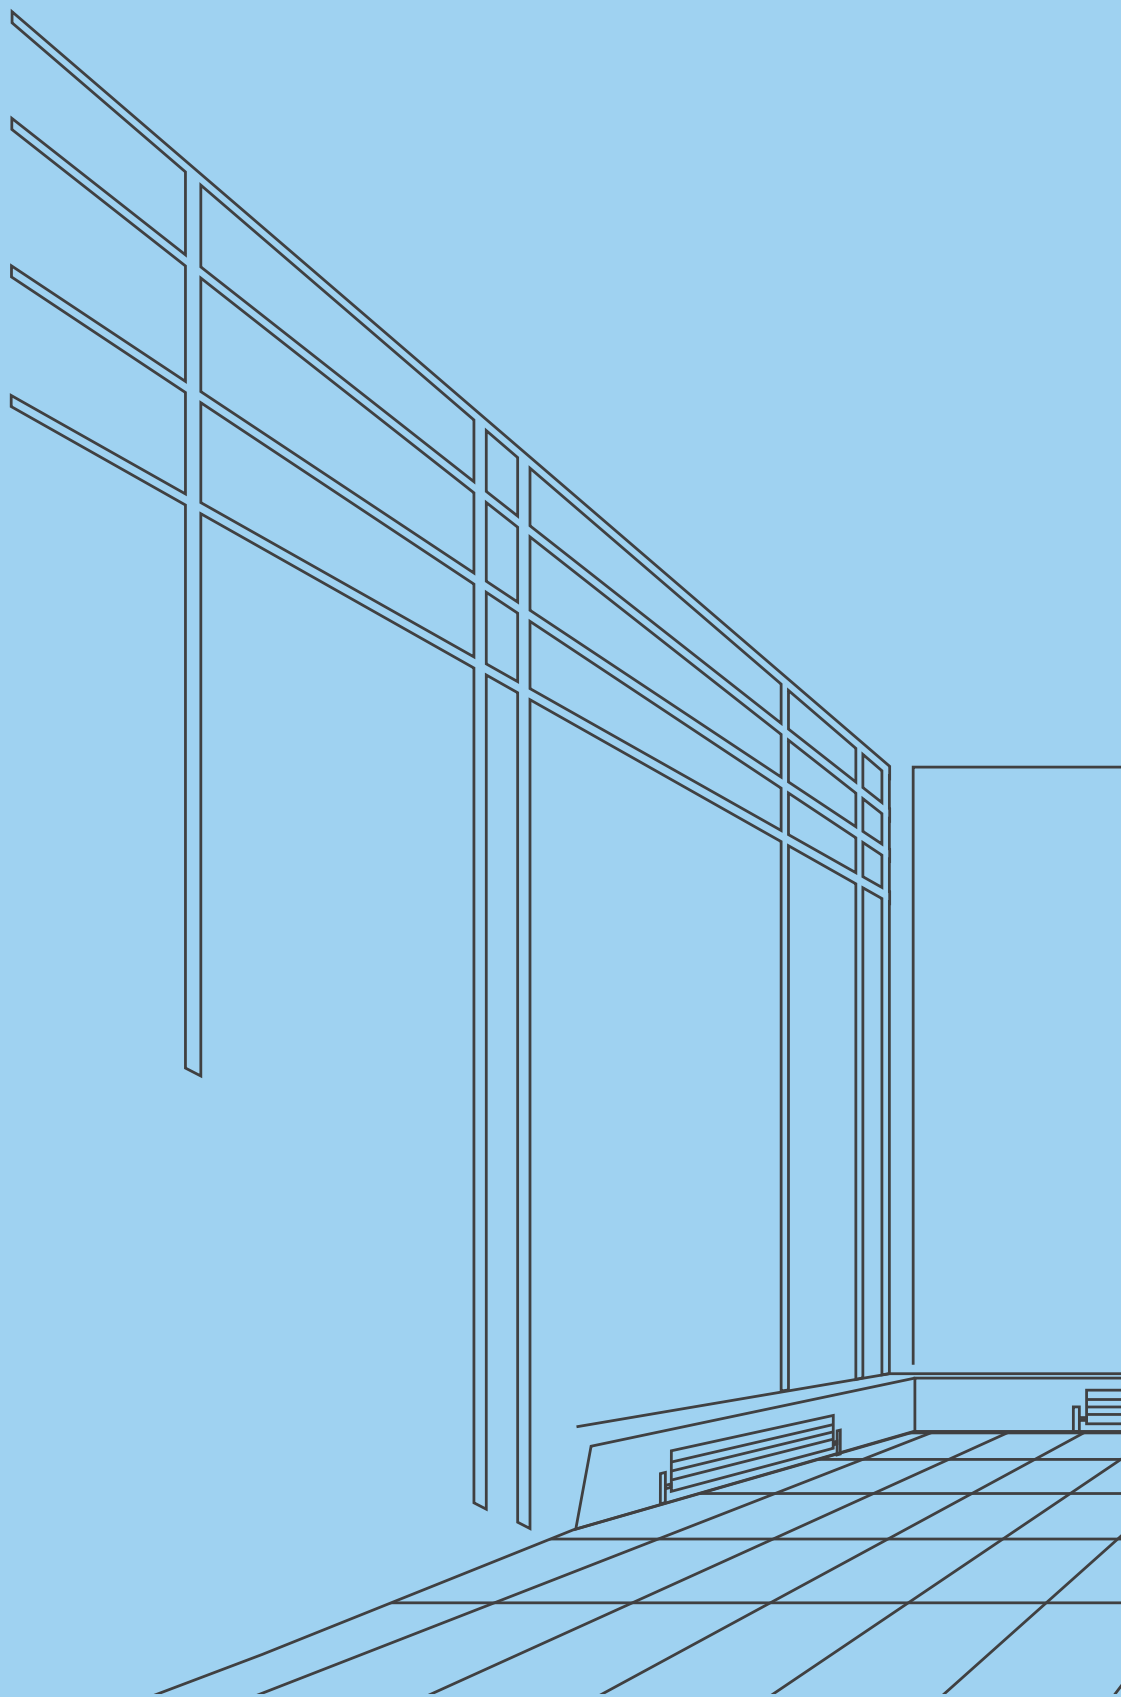

Plexiform S.p.A.

Via Gramsci, 45 - 20032 Cormano (MI) Italy - Tel. +39 02 66300740 - Fax +39 02 66300518 - www.plexiform.it - info@plexiform.it